

SLIDING CUPBOARD DOORS

PER DOOR

FEATURES:

- Nylon wheels with lubricated ball bearings - quiet and smooth
- Dual wheels on pivoting axle - 20kg per door max.
- Height adjustment slot for accurate door alignment
- Offset race assembly for varying door thicknesses
- Ribbed aluminium track for visual appeal
- Zinc plated steel components reduces corrosion
- Extruded aluminium tracks
- Packaged sets or sold separately

TT550 Wheel assembly


S30 Pack of 2 TT30 nylon light duty door guides

TT552 Aluminium single track - 4500mm

For 2 or more doors in bi-passing applications run the tracks parallel to each other. The door and/or track gap will be determined by the door thickness.

Opening height = door height + 25mm.


Opening width = door width x number of doors, less 30mm for each overlap

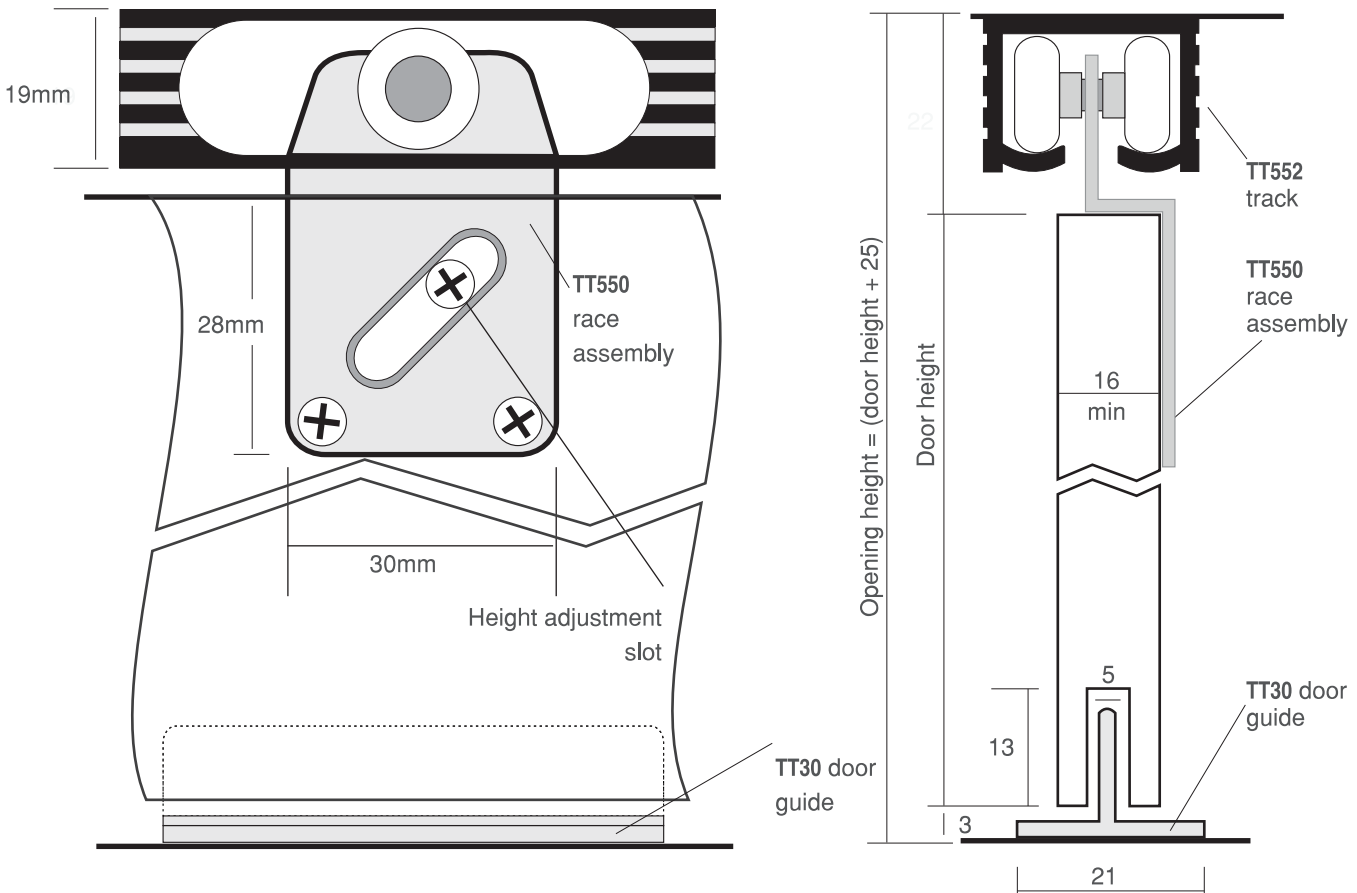

TT30



TT550



TT552
Aluminium Track