


Door Closers



LAMP LDD-S LAPCON DOOR DAMPER
(SURFACE MOUNT/RETROFIT DESIGN)

- Door weight : 15 - 40kg (33-88lbs)
- Door width : Max. 900mm (35-7/16")

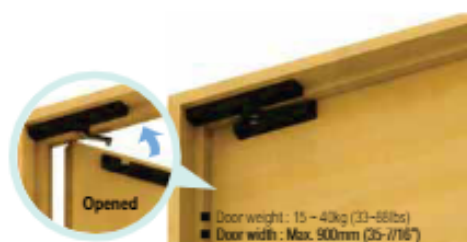

LAMP LDD-V CONCEALED DOOR DAMPER

- Door Weight - 15 - 40 kgs.
- Door Width - Max. 900mm
- Door Thickness - Min. 33mm



LAMP LDD-V100
HEAVY DUTY DOOR DAMPER

- Door weight: Max. 100 Kgs
- Door Width - Max. 900mm
- Door Thickness - 40-60mm



ST-C115

- Aluminum
Spring Door Closer
Load : 40kgs



MI-701 / 701D / MI-713

- Door Closer
• Door weight: 15-30kg
(D= Hold open)
Medium Duty Door Closer
• Door weight: 45 - 80kg



MI-6303G

- Heavy Duty Door Closer with Slide Arm
• Load Capacity: Max. 65kgs



DT-30

- Concealed Door Closer
• 500,000 Service Life
• Economical Lines
• Door size: 900mm x 2100mm
• Door weight: 25 - 45kg



MI-081


- Door Closer
Door weight: 35-55kgs

GEZE TS 500NV



Closing force in accordance with En 1154 : 1 - 4
 Left width recommended up to: 1100mm
 Left weight recommended up to: 150kg
 Height: 42mm

GEZE TS 550NV

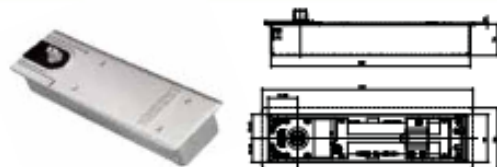

Closing force in accordance with En 1154 : 3 - 6
 Left width recommended up to: 1400mm
 Left weight recommended up to: 300kg
 Height: 54mm

GEZETS 3000 V

Guide rail door closer for 1-leaf doors up to 1100mm leaf width



The overhead door closer TS 3000 V is suitable for both left and right hand single action door. The closing force, size 1-4 acc. to EN 1154, can be adjusted at the side, the hydraulic latching action and thermally stabilised closing speed can be adjusted from the front.



Products features	GEZE TS 3000 V closer	GEZE TS 3000 V BC closer
Closing force in accordance with En 1154	1-4	1-4
Leaf width recommended up to	1100mm	1100mm
Identical version DIN-L and DIN-R		
Product tested in accordance with	Door closer tested in accordance with EN 1154	
Length	276mm	276mm
Installation depth	46mm	46mm
Height	60mm	60mm
Functions		
Adjustable closing force	Yes, clockwise	Yes, clockwise
Adjustable closing speed	Yes	Yes
Adjustable latching action	Yes, via valve	Yes, via valve
Integrated back check	No	Yes, hydraulically adjustable
Closing force adjustment position	At the side	At the side
Safety valve as protection against vandalism		
Thermo-constant valves		


• = Yes □ = No

GEZE Boxer

Integrated door closer for single-leaf doors with a leaf width of up to 1400mm



GEZE Boxer integrated door closer is incorporated discreetly into the door leaf and frame. The guide rail and lever are only visible when the door is open. Once the door closer is installed, the closing force and speed, latching action and hydraulic back check can be conveniently adjusted from the top. It is suitable for both left and right hand single action door.

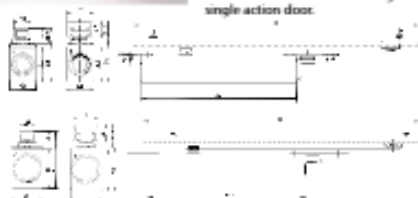

Products features	Boxer closer	Boxer closer
Closing force in accordance with En 1154	2-4	3-6
Leaf width recommended up to	1100mm	1400mm
Leaf weight recommended up to	100kg	100kg
Minimum leaf thickness	48	50
Identical version DIN-L and DIN-R		
Product tested in accordance with	Door closer tested in accordance with EN 1154	
Suitable for fire protection doors		
Length	266mm	266mm
Installation depth	32mm	46mm
Height	45mm	56mm
Functions		
Adjustable closing force		Yes, infinitely variable
Adjustable closing speed		
Adjustable latching action		Yes, via valve
Integrated back check		Yes, hydraulically adjustable
Closing force adjustment position		Top
Safety valve as protection against vandalism		


• = Yes □ = No

GEZE TS 2000V

Link arm door closer for single-leaf doors with a leaf width up to 1250mm



The overhead door closer is suitable for both left and right hand single action door. The closing force is variable in accordance with DIN En 1154, size 2/4/5, by mounting position. The closing speed can be conveniently adjusted from the front and latching action is adjusted by means of the link arm.



Products features	GEZE TS 2000 NV closer	GEZE TS 2000 V closer	GEZE TS 2000 VBC closer
Closing force in accordance with En 1154	2-4	2/4/5	2/4/5
Leaf width recommended up to	1100mm	1250mm	1250mm
Identical version DIN-L and DIN-R			
Product tested in accordance with	Door closer tested in accordance with EN 1154		
Suitable for fire protection doors			
Mounting plate with hole patterns acc. to EN 1154 (supplement 1)			
Length		266 mm	
Installation depth		46mm	
Height		60mm	
Functions			
Adjustable closing force	• With variable adjustable		• Via mounting
Adjustable closing speed			
Adjustable latching action	• Via Valve		• Via link arm
Integrated back check	Optional		• Hydraulic band
Closing force adjustment position	On the side		Mounting position
Safety valve as protection against vandalism			

• = Yes □ = No